




Releasable Cable Tie



Material: UL approved Black NYLON 66, 94V-2 These ties, which are easily assembled by hand or with pliers, remain securely locked until intentionally released by operating the finger catch. Colour: natural.
For black please add -1 to part N°.

Part N°	Dimensions mm. L W	ØMax. Bundle mm.	Max. Tensile Strength Kg.	
HV-125	125 x 7.6	30	22	100
HV-150	150 x 7.6	35	22	100
HV-200	200 x 7.6	50	22	100
HV-250	250 x 7.6	65	22	100
HV-300	300 x 8.0	80	22	100


Releasable Cable Tie

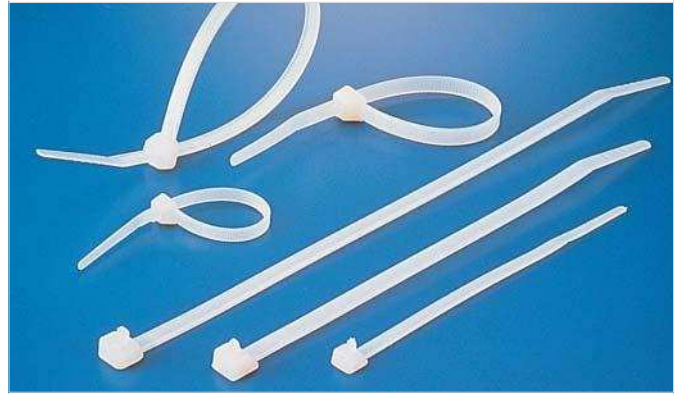

Finger catch design to release cable tie locking where replacement is required. Good for temporary fastening purpose.


Part N°	Dimensions mm. L W	ØMax. Bundle mm.	Max. Tensile Strength Kg.	
RCV-100	100 x 3.6	25	18	100
RCV-150	150 x 4.7	39	22	100
RCV-200	200 x 4.7	55	22	100
RCV-250	250 x 4.8	74	22	100
RCV-300	300 x 4.8	88	22	100
RCV-370	370 x 4.8	102	22	100

Push Mount Collect Tie

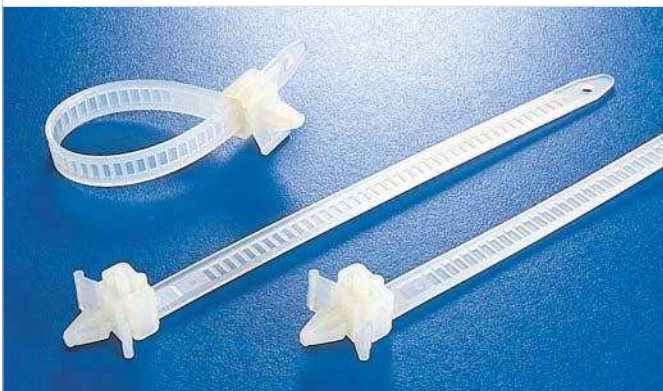

Material: UL approved NYLON 66, 94V-2

Part N°	Dimensions mm. L W	ØMax. Bundle mm.	Max. Tensile Strength Kg.	
PHV-150	150 x 8	37	40	100

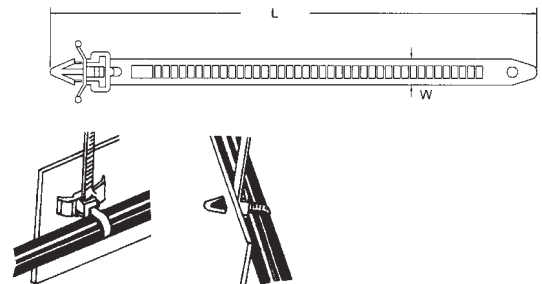

Mounting "Hole" of 5.4mm.