




PVC

Insulated Butt Connectors

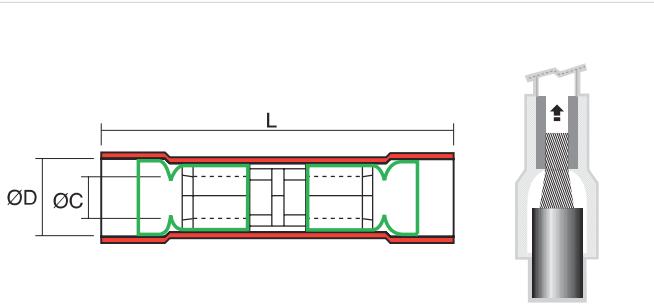


Insulation material: PVC pipe
Max. electrical rating: 600V - 75°C

WITH COPPER SLEEVE

Part N°	Section mm ² /AWG	Dimensions (mm)	ØC	ØD	L		
PVCC-15017-EF	0.25-1.65 22-16			1.80	4.20	26.20	100/1000
PVCC-25023-EF	1.04-2.63 16-14			2.70	5.00	27.30	100/1000
PVCC-55034-EF	2.63-6.64 12-10			3.40	6.80	31.50	50/500

Quick Splice Connectors

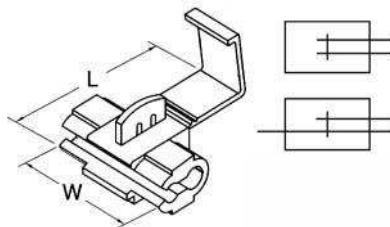

Insulation material: P.P.
Max. electrical rating: 600V - 105°C

TERMINAL MATERIAL: BRASS

Part N°	Section mm ² /AWG	Dimensions (mm)	W	L	
CR-100	0.25-1.65 22-18		20.00	27.00	100/1000
CR-250	1.04-2.63 18-14		20.00	27.00	100/1000
CR-600	2.63-6.64 12-10		21.00	34.50	50/500