



Strike



On specific surface hook for triple circuit rail adaptor...

On triple circuit rail adaptor...

Description :

Surface mounted LED spotlight.


Uses :

Supermarkets, shops, etc....

Product informations :

LED driver included / Material : die-cast aluminium / CRI > 80

Dimensions :

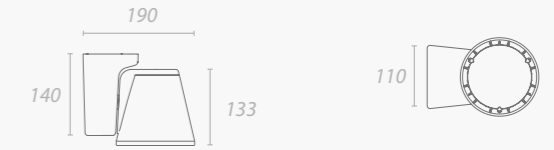

Wattage, luminous flux and performance (standard light sources) :

		Flux	Wattage	Performance	Lamp life
3000°K	2000 Lm	2688 Lm	17,3 W	155 Lm/W	50 000 hours L80 B10
3000°K	3000 Lm	3402 Lm	24,8 W	137 Lm/W	50 000 hours L80 B20
3000°K	4000 Lm	4651 Lm	31,5 W	148 Lm/W	50 000 hours L80 B20
3000°K	5000 Lm	5222 Lm	37,1 W	141 Lm/W	50 000 hours L80 B20
3000°K	6000 Lm	6313 Lm	41,5 W	152 Lm/W	50 000 hours L80 B10
4000°K	2000 Lm	2098 Lm	11,7 W	179 Lm/W	50 000 hours L80 B10
4000°K	3000 Lm	3515 Lm	22,7 W	155 Lm/W	50 000 hours L80 B20
4000°K	4000 Lm	4453 Lm	27,6 W	161 Lm/W	50 000 hours L80 B20
4000°K	5000 Lm	5433 Lm	37,1 W	146 Lm/W	50 000 hours L80 B20
4000°K	6000 Lm	6607 Lm	41,7 W	158 Lm/W	50 000 hours L80 B10
5000°K	2000 Lm	1970 Lm	11,7 W	168 Lm/W	50 000 hours L80 B10
5000°K	3000 Lm	3515 Lm	22,7 W	155 Lm/W	50 000 hours L80 B20
5000°K	4000 Lm	4453 Lm	27,6 W	161 Lm/W	50 000 hours L80 B20
5000°K	5000 Lm	5433 Lm	37,1 W	146 Lm/W	50 000 hours L80 B20
5000°K	6000 Lm	6204 Lm	41,7 W	149 Lm/W	50 000 hours L80 B10

Filters :

For standard light sources : Standard / food / bakery / opaline


Mountings :

Specific surface hook for triple circuit rail adaptor, triple circuit rail adaptor

Finishes :

White (9016G) / Grey (9006G) / Black (9005G) / RAL colour chart

Light distribution curves :

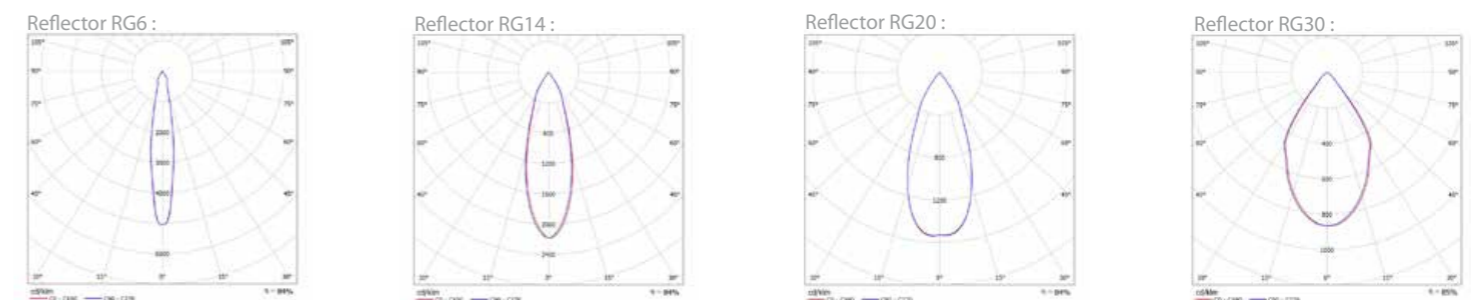

(Ta < 35°C)

Not contractual document

