

CV-801




PS/2 DB-15 KVM Benefits

- ▶ PS/2 DB-15 KVM with 8 ports in 1U
- ▶ Mix PS/2, USB & SUN with Multi-Platform switch capability
- ▶ Low cost reliable PS/2 based server management
- ▶ No software or drivers required
- ▶ Easy & quick installation

Switch Features & Options

- Multi lingual on screen display menu
- Advanced user profiles and configurable OSD hot key combinations
- DC power options : 12V / 24V / 48V / 110 ~ 125V

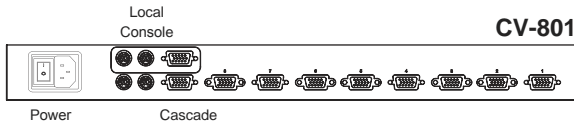

Ordering Information


Console	Local	Remote	IP	8-port
	1	0	0	CV-801

KVM Specification

■ KVM Port	
Number of ports:	8
Connector:	DB-15 combo connector
Connectivity:	PS/2 3-in-1 KVM cable, up to 6, 10 & 15 feet
■ Local Console	
Graphic Connector:	1 x DB-15 VGA
Resolution:	Up to 1600 x 1200
Input device:	2 x PS/2 for keyboard & mouse
■ Management	
OSD:	English
Hotkey:	Scroll-lock
Security:	Password enable & disable
PC Selection:	Front button, OSD menu & hotkey
■ Expansion:	Up to 64 servers by 8-level cascade
■ Compatibility	
Multi-platform:	Mix PCs, SUN and Mac G3 / G4 Mac / iMac
Support:	Windows 7 / Vista / 2003 / XP, Linux, Unix

■ Power	
Input:	Auto sensing 100 to 240VAC, 50 / 60 Hz
Option DC:	12V / 24V / 48V / 110 ~ 125V DC input
Consumption:	Max. 12 Watt, Standby 5 Watt
■ Regulatory :	
Safety:	FCC & CE certified
Environment:	RoHS2 & REACH compliant
■ Environmental	
Operating:	0 to 50°C
Storage:	-5 to 60°C
Relative humidity:	90%, non-condensing
Shock:	50G peak acceleration (11ms, half-sine wave)
Vibration:	58~100Hz / 0.98G (11ms / cycle)
■ Product Information	
Dimension (W x D x H):	443 x 171 x 44 mm / 17.4 x 6.7 x 1.73 inch
Net weight:	3 kg / 6.5 lb
■ Packing Information	
Dimension (W x D x H):	500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch
Gross weight:	5 kg / 11 lb

KVM port connection

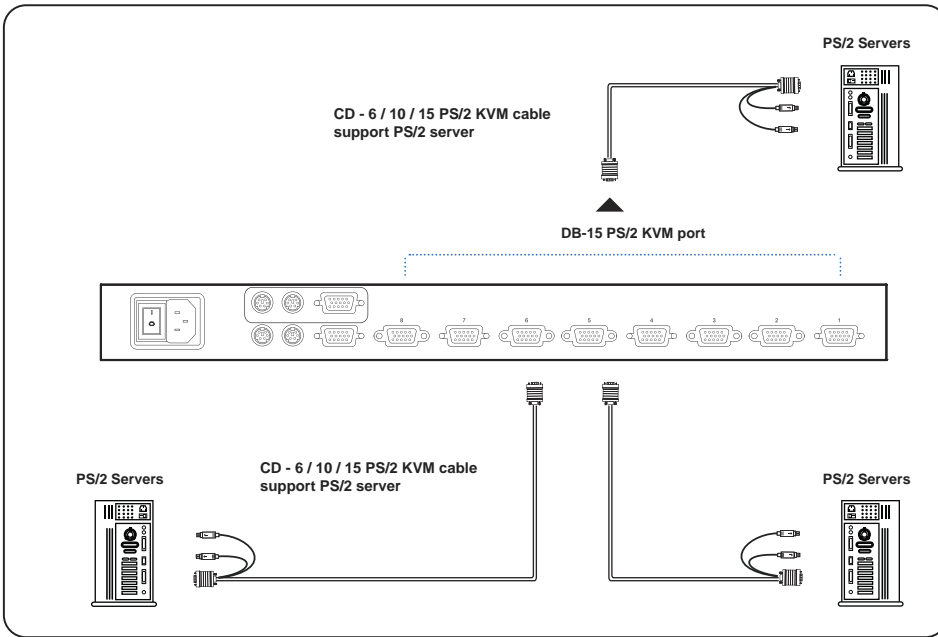


CD-6 / CD-10 / CD-15

- 6 / 10 / 15 ft PS/2 KVM cable
- Support PS/2 server

! For detailed product specifications and options, please download the user manual from the link below : www.austin-hughes.com/support/usermanual/cyberview/UM-CV-PS2KVM.pdf

KVM Cascade

- Cascade up to 8 levels, 64 servers
- Cascading multiple KVM with CA-6 cascade cable.

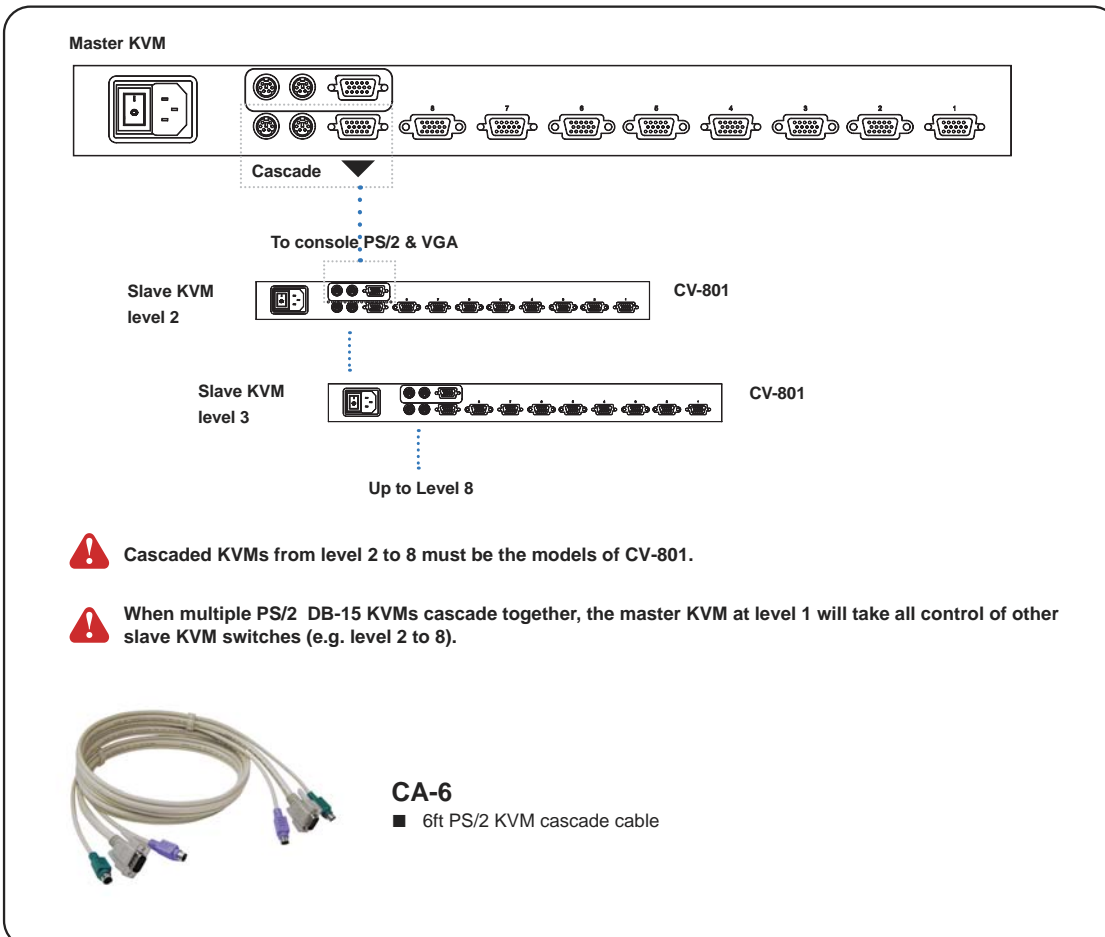

! Cascaded KVMs from level 2 to 8 must be the models of CV-801.

! When multiple PS/2 DB-15 KVMs cascade together, the master KVM at level 1 will take all control of other slave KVM switches (e.g. level 2 to 8).



CA-6

- 6ft PS/2 KVM cascade cable