


MPC TYPE "DSA"




| SIZES | | | | | | | |
|----------------------------|------------------------|----------------|---------------|---------------------|------------|------------------------------------|---|
| clamp size minimum: | clamp size maximum: | Band width: | Band W1;W5 | Thickness W1; W5 | Screw M | Tightening Torque: AD* in Nm | |
| d | D | B1+/-1 | S1 | S2 | | | |
| 30 | 40 | 20 | 1 | 2 | 6 | 8 | |
| 35 | 45 | 20 | 1 | 2 | 6 | 8 | |
| 40 | 50 | 20 | 1 | 2 | 6 | 8 | |
| 45 | 55 | 20 | 1 | 2 | 6 | 8 | |
| 50 | 60 | 20 | 1 | 2 | 6 | 8 | |
| 55 | 65 | 20 | 1 | 2 | 6 | 8 | |
| 60 | 70 | 20 | 1 | 2 | 6 | 8 | |
| 65 | 75 | 20 | 1 | 2 | 6 | 8 | |
| 70 | 80 | 20 | 1 | 2 | 6 | 8 | |
| 75 | 85 | 20 | 1 | 2 | 6 | 8 | |
| 80 | 90 | 20 | 1 | 2 | 6 | 8 | |
| 85 | 95 | 20 | 1 | 2 | 6 | 8 | |
| 90 | 100 | 20 | 1 | 2 | 6 | 8 | |
| 95 | 105 | 20 | 1 | 2 | 6 | 8 | |
| 100 | 110 | 20 | 1 | 2 | 6 | 8 | |
| 105 | 115 | 20 | 1 | 2 | 6 | 8 | |
| 110 | 120 | 20 | 1 | 2 | 6 | 8 | |
| 115 | 125 | 20 | 1 | 2 | 6 | 8 | |
| 120 | 130 | 20 | 1 | 2 | 6 | 8 | |
| 125 | 135 | 20 | 1 | 2 | 6 | 8 | |
| 130 | 140 | 20 | 1 | 2 | 6 | 8 | |
| 135 | 145 | 20 | 1 | 2 | 6 | 8 | |
| 140 | 150 | 20 | 1 | 2 | 6 | 8 | |
| 145 | 155 | 20 | 1 | 2 | 6 | 8 | |
| 150 | 160 | 20 | 1 | 2 | 6 | 8 | |
| 155 | 165 | 20 | 1 | 2 | 6 | 8 | |
| 160 | 170 | 20 | 1 | 2 | 6 | 8 | |
| 165 | 175 | 20 | 1 | 2 | 6 | 8 | |
| 170 | 180 | 20 | 1 | 2 | 6 | 8 | |
| 190 | 200 | 20 | 1 | 2 | 6 | 8 | |
| 200 | 210 | 20 | 1 | 2 | 6 | 8 | |
| 210 | 220 | 20 | 1 | 2 | 6 | 8 | |
| 220 | 230 | 20 | 1 | 2 | 6 | 8 | |
| 230 | 240 | 20 | 1 | 2 | 6 | 8 | |
| AD*=Maximum advised torque | 240 | 250 | 20 | 1 | 2 | 6 | 8 |

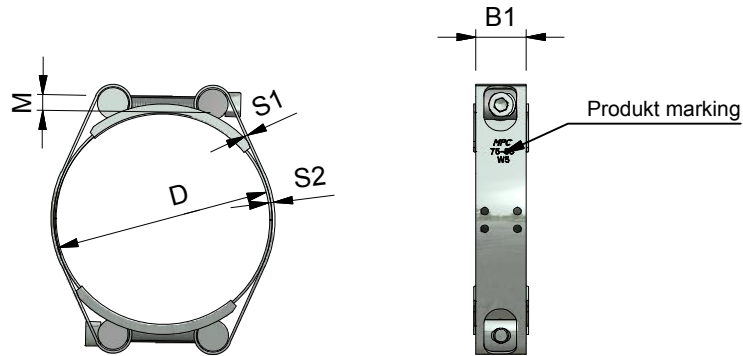

Material:

W1, W5

Third angle projection:



Part number:

DSA

Description:

MPC Industries Double Super Clamp

Revision:

Drawn by: Gyula

Creation date: 27-3-2014

Scale 1:1

Units: mm

Format:

A4