



STD SILVER ET2 STACK TUMBLE DRYERS

STD-11/ STD-16



EASY TOUCH 2

4,3" touch screen user friendly and programmable ET2
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily trans-
formable to coin laundry uses



CONNECTIVITY

Remote technical service
Managemnt of laundries: OPL and COIN
Remote payment



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Reverse door opening



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data
recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved




OPTIONS

- CARE DRY - Intelligent humidity control
- Double doorglass
- Tropicalized model
- SPRINKLER - Integrated Fire Extinguishing System
- Exhaust silencer Ø 200 mm
- Printer
- Danube Online communication kit
- Rear panel external air + filter
- Stainless steel AISI 304 outercasing
- Stainless steel AISI 304 frontal panel
- Wooden packing
- Ship voltage for electric models:
440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	STD-11 SILVER ET2	STD-16 / STD-16 G TURBO		
CAPACITY					
Capacity 1/18	Kg	23	37		
Capacity 1/20	Kg	22	34		
Hourly Output*	Kg/h	34,5	36,3 (76 STD16 G PLUS)		
Evaporation capacity*	l/h	16,5	18,6		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547/1.522	547/1.522		
Load hole bottom height	mm	260/1.235	260/1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	Kw	0,37x2	0,37x2		
Fan motor power STACK SILVER	Kw	0,25x2	0,25x2		
Electric heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (elec.model) STACK SILVER	Kw	25,34	25,34		
Gas heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (gas model) STACK SILVER	Kw	1,34	1,34		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	785/865		785/865	
Net Depth / Gross Depth	mm	972/1.055		1.242 / 1.325	
Net Height / Gross Height	mm	1.980/2.126		1.980/2.126	
Net weight / Gross weight	Kg	260/268		290/303	
OTHERS					
Max airflow	m3/h	1000		1000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

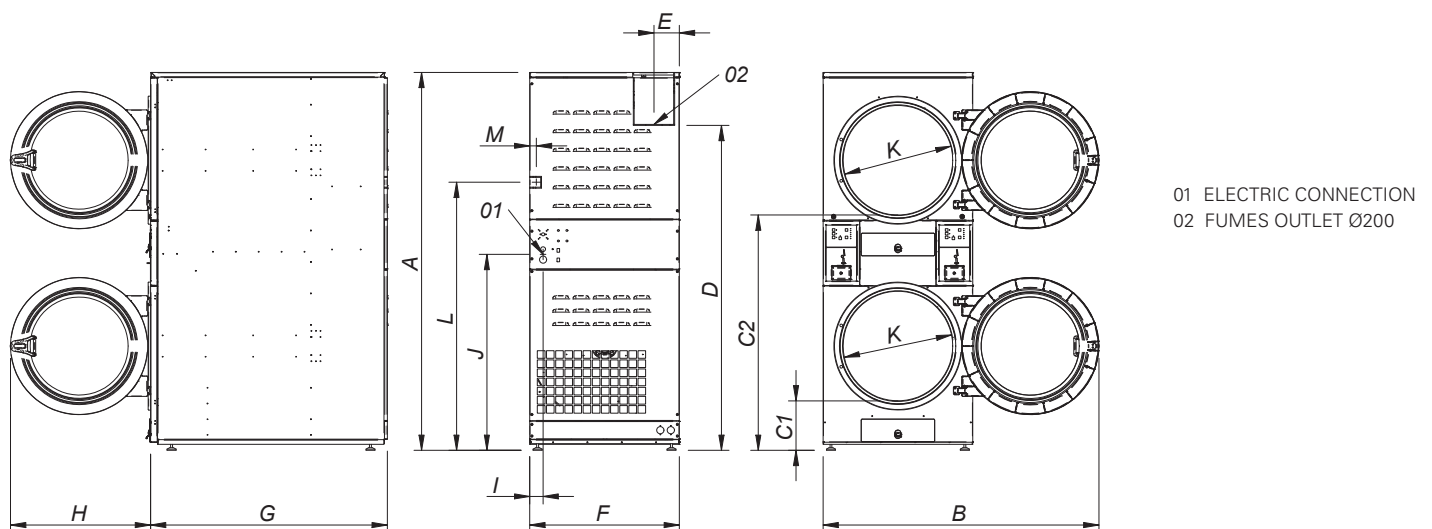

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
STD-11	1980	1447	259	1234	1620	135	785	972	735	64	1031	575	1406	35
STD-16	1980	1447	259	1234	1620	135	785	1242	735	64	1031	575	1406	35