


Panneau de contrôle



Conception sans ventilateur
Système de suspension léger (44-60)



Intel® Celeron® J1900 / Intel® Celeron® J6412 / 6th/7th Gen Intel® Core™ (Optional)

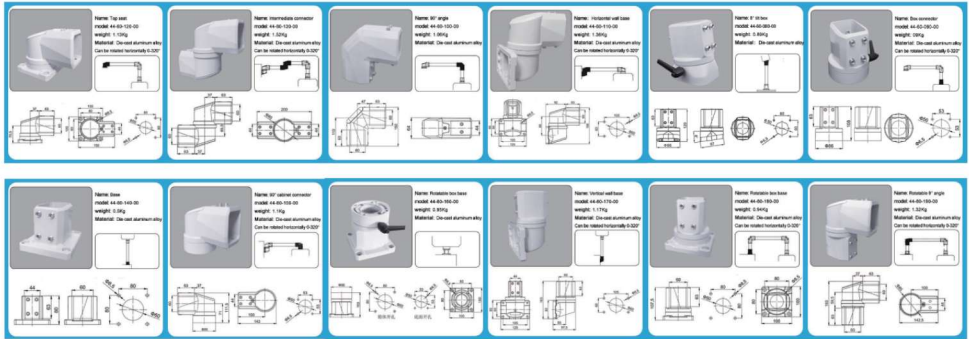

I/O	CPU	Intel® Celeron® J1900		Intel® Celeron® J6412	6th/7th Gen Intel® Core™
	VIDEO	1 x VGA / 1 x H-DMI			
	Ethernet	2 x LAN 10/100/1000/2500 Mbps			
	USB	3 x USB2.0 / 1 x USB3.0		4 x USB 3.0	1 x USB2.0 / 2 x USB3.0
	Button	IDEC 422 Select / Green / Red / Stop Button (optional)			
	Bracket kit	44-60 Light Cantilever Accessories			
	Other I/O Interface	Optional (WiFi / Bluetooth / 4G /)			


Panneau de contrôle



Conception sans ventilateur
Système de suspension inox (Série 48)



8th/10th Gen Intel® Core™ / 12th/13th Gen Intel® Core™ (Optional)

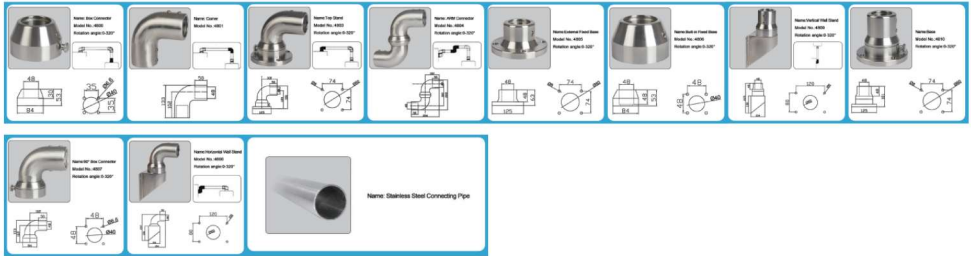

I/O	CPU	Intel® 8th Gen Core		Intel® 12th Gen Core™
	VIDEO	i3-8145U 2.1GHz / i5-8265U 1.6GHz / i7-8565U 1.8GHz		i3-1215U 1.2GHz / i5-1235U 1.3GHz / i7-1255U 1.7GHz
	Ethernet	2 x DP / 1 x H-DMI		2 x HD-MI
	USB	2 x LAN 10/100/1000/2500 Mbps		2 x 2.5GbE / 1 x 1GbE
	Button	1 x USB2.0 / 4 x USB3.0		4 x USB 3.2 Gen2
	Bracket kit	RAFI FS22+ Select / Green / Red / Stop Button (optional)		
	Other I/O Interface	Stainless Steel 48 Series		
Expansion		Optional (WiFi / Bluetooth / 4G /)		
	M.2	1*M.2 (Key-E, 2230, PCIe+USB, Wi6+BT)		
	Other I/O Interface	1*M.2 (Key-B, 3042/3052, PCIe/ USB 3.0+USB2.0, 4G/5G)		