

Software

MIMAKI'S SOPHISTICATED AND USER FRIENDLY RASTERLINK6 PLUS RIP SOFTWARE MAXIMISES THE PERFORMANCE OF THE UCJV SERIES.

Newly upgraded RIP software with increased functionality & user-friendliness

Raster LINK 6 PLUS

- | | |
|---|---|
| <p>New Functions</p> <ul style="list-style-type: none"> • ID CUT1 for consecutive cutting • Multi-Layer Print for greater creativity • [Braille Print] for simple Braille text creation | <p>New PDF handling including transparent effects</p> <ul style="list-style-type: none"> • PDF data with transparent effects is accurately reproduced |
|---|---|

UCJV300 Series
HIGH-SPECIFICATION LED-UV
PRINTER/CUTTER
with 7 colours and 4-layer printing

UCJV150-160
ENTRY-LEVEL LED-UV
PRINTER/CUTTER
with 4 colours and high cost/performance ratio


Connectivity

IN ADDITION TO USB2.0 CONNECTIVITY, AN ETHERNET CONNECTION IS AVAILABLE ON THE UCJV150/300, allowing several printers to be connected to one computer. Easy to install, it also enables the printer status to be sent to a PC or mobile phone via the internet.




PRINT SPEEDS

UCJV300 (4C ONE-LAYER)

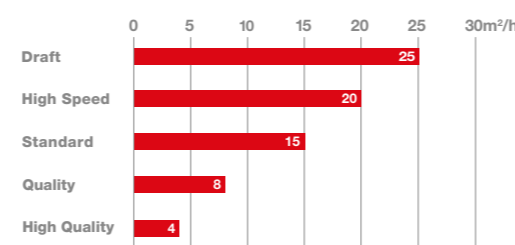

UCJV300 (7C ONE-LAYER) / UCJV150 (4C ONE-LAYER)

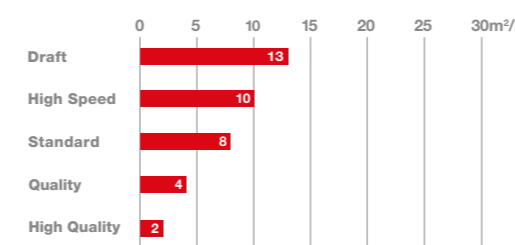

* Print with white ink at up to 5.4 m²/h

SPECIFICATIONS

Item	UCJV150-160	UCJV300-75	UCJV300-107	UCJV300-130	UCJV300-160
Printhead	1 drop-on-demand piezoelectric head	2 drop-on-demand piezoelectric head (in-line configuration)			
Print resolution	300dpi, 600dpi, 900dpi, 1200dpi				
Drop size	Min: 7pl, Max: 28pl				
Head height	Manual adjustment (2.0/2.5/3.0mm from platen)				
Ink type	LED-UV ink LUS170				
Ink colour	4C (CMYK)	4C (CMYK) / 7C (CMYKcLmW)			
Ink supply	1L bottle supply				
Max printing width	1,610mm	800mm	1,090mm	1,361mm	1,610mm
Max media width	1,620mm	810mm	1,100mm	1,371mm	1,620mm
Min media width	210mm				
Media thickness	1.0mm or less				
Outside diameter	250mm or less				
Roll weight	40kg or less				
Outside dimensions (W x D x H)	2,900 x 776 x 1,475mm	2,090 x 776 x 1,475mm	2,380 x 776 x 1,475mm	2,650 x 776 x 1,475mm	2,900mm x 776mm x 1,475mm
Bodyweight	183kg	139kg	156kg	172kg	188kg
Power supply	2x Single phase (AC100-120/200-240V +/-10%, 50/60Hz +/-1Hz)				
Power consumption	AC100V: 1.44kW / AC200V: 1.92kW				
Operational environment	Temperature: 20-30°C, Humidity: 35-65%Rh, Guaranteed temperature: 20-25°C, Temperature inclination: +/-10°C/h or less, Dust: 0.15mg/m³ (equivalent to office)				

SUPPLIES

Part No.	Description	Pack Size
LUS17-C-BA-1	LUS-170 UV Curing Ink - Cyan	1 Litre Bottle
LUS17-M-BA-1	LUS-170 UV Curing Ink - Magenta	
LUS17-Y-BA-1	LUS-170 UV Curing Ink - Yellow	
LUS17-K-BA-1	LUS-170 UV Curing Ink - Black	
LUS17-LC-BA-1	LUS-170 UV Curing Ink - Light Cyan	
LUS17-LM-BA-1	LUS-170 UV Curing Ink - Light Magenta	
LUS17-W-BA-1	LUS-170 UV Curing Ink - White	
FL007-Z-BA	Cleaning liquid 07	

* Some of the samples in this folder are artificial renderings * Specifications, design and dimensions stated in this folder may be subject to change without notice (for technical improvements, etc.) * The corporate and merchandise names written on this folder are the trademark of the respective corporations * Inkjet printers print using extreme fine dots, so colours may vary after replacement of the printing heads, also note that if using multiple printer units, colours could vary slightly from one unit to other unit due to slight individual differences * Composer's errors reserved

MEUUCJV02-E

UCJV Series

THE TECHNOLOGICALLY SUPERIOR PRINTER/CUTTER THAT DOES IT ALL

www.mimakieurope.com info@mimakieurope.com twitter: @MimakiEurope
Mimaki Europe B.V. Stammerdijk 7E, 1112 AA Diemen, The Netherlands T: +31 (0)20 4627640

id.
numerique



Mimaki

The most efficient wide format workflow – ever

OUTPUT FROM THE MIMAKI UCJV SERIES IS INSTANTLY DRY, MAKING IT POSSIBLE TO LAMINATE AND/OR CUT IMMEDIATELY AFTER PRINTING. THIS RESULTS IN SIGNIFICANT WORKFLOW TIME SAVINGS OVER ALTERNATIVE INK TYPES, AIDING PRODUCTIVITY AND THROUGHPUT.

UNPARALLELED MEDIA VERSATILITY

Thanks to the UCJV Series' use of state-of-the-art LED UV printing technology, it is suitable for printing on an unparalleled range of materials, such as banner, self-adhesive PVC, transparent PET film, paper, backlit media, soft signage and more.

HIGH SCRATCH RESISTANCE

The high scratch resistance of Mimaki's LUS-170 LED UV ink allows printing on media such as tarpaulin without the need for lamination after printing. The reduced need for over-lamination delivers cost savings and minimises production time.

HIGHLY PROFITABLE. ULTRA-LOW RUNNING COSTS

The Mimaki UCJV Series has the lowest running ink costs per m² in its class, as a result of its innovative application of the latest LED UV ink technology and its sparing ink usage. The printer's ability to output to a vast range of media, including low cost products combined with a highly competitive ink price ensures running costs are kept low and profits high.

WHITE INK

When used with Mimaki's white LUS-170 LED UV ink, the UCJV300 delivers the most opaque and dense result in its class, ensuring high colour vibrancy and yield when overprinting with process colours on clear and non-white substrates. With productive print speeds – even when using white, it's also possible to generate 4 and 5-layer prints that deliver creative, value added applications.

MAKING PRINT AND CUT EASIER THAN EVER BEFORE

Mimaki's new ID Cut function has been designed to enable printer operators to contour cut multiple jobs with minimal intervention. Offering trouble-free, automatic cutting of consecutive jobs, it saves time and reduces potential material waste.

An ID barcode is printed through the RasterLink6 Plus RIP along with the image, with the code including cutting and rotation information. The crop mark sensor reads the ID code and automatically executes cutting, ensuring all alignment and rotational requirements are observed.



ID CUT



UCJV300-160

UCJV300-130

UCJV300-107

UCJV300-75



Harnessing the power of LED UV technology

LED UV PRINTING OFFERS UNIQUE ADVANTAGES. THE INK REMAINS ON THE SURFACE OF THE MEDIA WHEN PRINTED AND IS CURED IMMEDIATELY, WITHOUT DAMAGING (OR AFFECTING) THE SUBSTRATE, RESULTING IN A BROAD RANGE OF MATERIALS BEING SUITABLE FOR USE WITH THE PRINTER.

Mimaki's newly developed LUS-170 LED UV ink is nickel-free, has low VOCs, high colour density, scratch and chemical resistance and is GREENGUARD Gold certified. Products that are GREENGUARD Gold certified meet the rigorous standards for low emission of volatile organic compounds (VOCs) and ensure that a product is acceptable for use in environments such as schools and healthcare facilities.



UCJV150-160: ●●●●●
 UCJV300: ●●●●●○

MULTI-PURPOSE USE FOR INDOOR AND OUTDOOR APPLICATIONS

Such is the incredible capability of the UCJV Series printer/cutters, it's possible to produce a huge range of profitable applications on the one machine...

Fabric Signs | Backlit Graphics | Window Decoration | Banners | Labels & Stickers | Point of Sale | And Much More...



Unique 4-Layer Printing

THE MIMAKI UCJV300 FEATURES A NEW 4-LAYER PRINTING MODE, DEVELOPED TO ENABLE TRANSFORMATIVE BACKLIT GRAPHICS TO BE PRODUCED THAT FEATURE DIFFERENT DAY AND NIGHT IMAGES, EXPANDING THE PRINTER'S APPLICATION RANGE WITH HIGH VALUE, CREATIVE CAPABILITIES

Ideal for retail graphics, window displays and signage, 4-layer graphics are created using an Adobe Illustrator plugin which includes a preview for the day and night images, supplied with Mimaki's RasterLink6 Plus RIP software.

*4-Layer Printing is only available on the UCJV300 when white ink is installed.



Core Tech delivers unbeatable technology

MIMAKI'S CORE TECHNOLOGIES DELIVER AN UNBEATABLE COMBINATION OF STABLE PRODUCTION AND CUTTING-EDGE IMAGING QUALITY. INCORPORATING INNOVATIVE PROPRIETARY TECHNOLOGY, CORETECH OFFERS SIGNIFICANT ADVANTAGES FOR PRINT OPERATORS.

STABLE PRODUCTION			HIGH IMAGE QUALITY		
<p>NCU Nozzle Check Unit automatically checks nozzle status and executes cleaning cycle when required</p>	<p>NRS Nozzle Recovery System substitutes defective nozzles to ensure uninterrupted operation</p>	<p>MCT Mimaki Circulation Technology periodically cycles white ink to prevent pigment deposition</p>	<p>MAPS Mimaki Advanced Pass System reduces banding by dispersing ink drops between passes.</p>	<p>VARIABLE DOT delivers high density print by removing the gap between dots</p>	<p>WCT Waveform Control Technology ensures high quality output by jetting almost perfect round ink droplets</p>