


## MANGANESE DIOXIDE LITHIUM BATTERIES (CR SERIES)

## MANGANESE DIOXIDE LITHIUM BATTERIES (CR SERIES)


### CR-1025




#### SPECIFICATIONS

Name	CR-1025
Nominal voltage (V)	3
Nominal capacity (mAh)	30
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	0.7


#### DISCHARGE TEMPERATURE CHARACTERISTICS

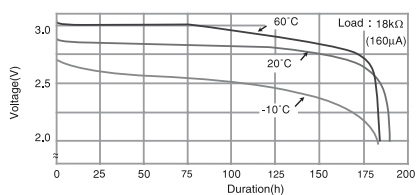


#### OPERATING VOLTAGE VS. DISCHARGE CURRENT\*

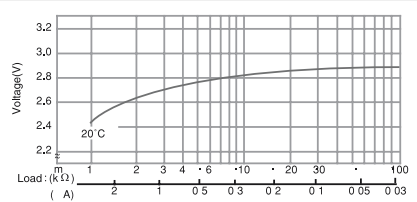

#### CAPACITY VS. LOAD RESISTANCE

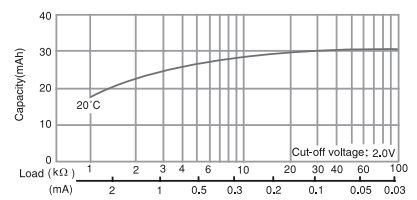


### CR-1216




#### SPECIFICATIONS

Name	CR-1216
Nominal voltage (V)	3
Nominal capacity (mAh)	25
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	0.7


#### DISCHARGE TEMPERATURE CHARACTERISTICS

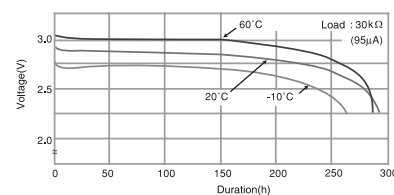


#### OPERATING VOLTAGE VS. DISCHARGE CURRENT\*

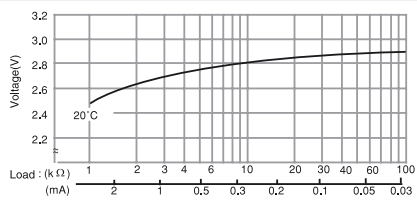

#### CAPACITY VS. LOAD RESISTANCE

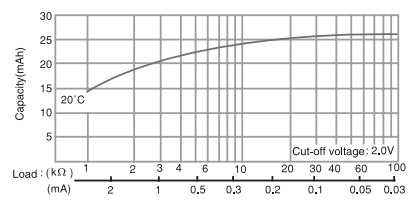


### CR-1220




#### SPECIFICATIONS

Name	CR-1220
Nominal voltage (V)	3
Nominal capacity (mAh)	35
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	1.2


#### DISCHARGE TEMPERATURE CHARACTERISTICS

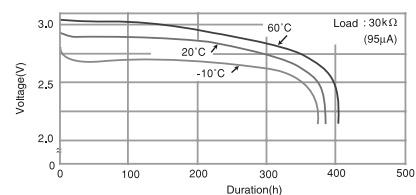


#### OPERATING VOLTAGE VS. DISCHARGE CURRENT\*

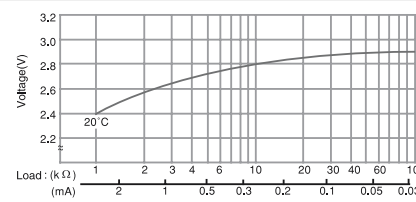

#### CAPACITY VS. LOAD RESISTANCE

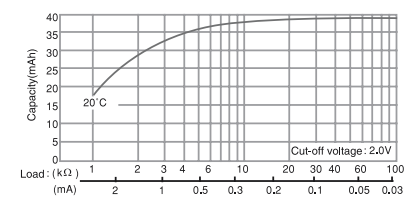


### CR-1612




#### SPECIFICATIONS

Name	CR-1612
Nominal voltage (V)	3
Nominal capacity (mAh)	40
Continuous drain (mA)	0.1
Operating temperature (°C)	-30 to +60
Weight (g)	0.8

#### DISCHARGE TEMPERATURE CHARACTERISTICS

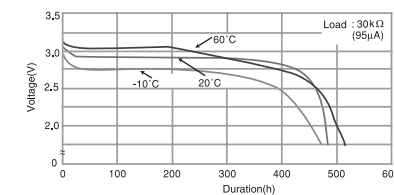

#### OPERATING VOLTAGE VS. DISCHARGE CURRENT\*

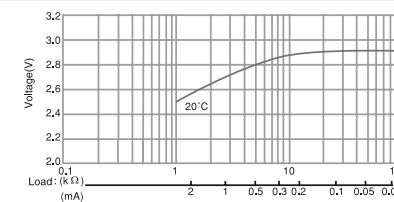

#### CAPACITY VS. LOAD RESISTANCE

