

CashGuard Core


Technical Datasheet



CashGuard Core is our newest and “smartest” cash management solution. Based on the most popular features of our CashGuard Premium but with a more modern touch.

CashGuard Core is built for supermarkets and other industries where speed is of essential importance.

CashGuard Core also features a note deposit for extra security on your high denomination banknotes.

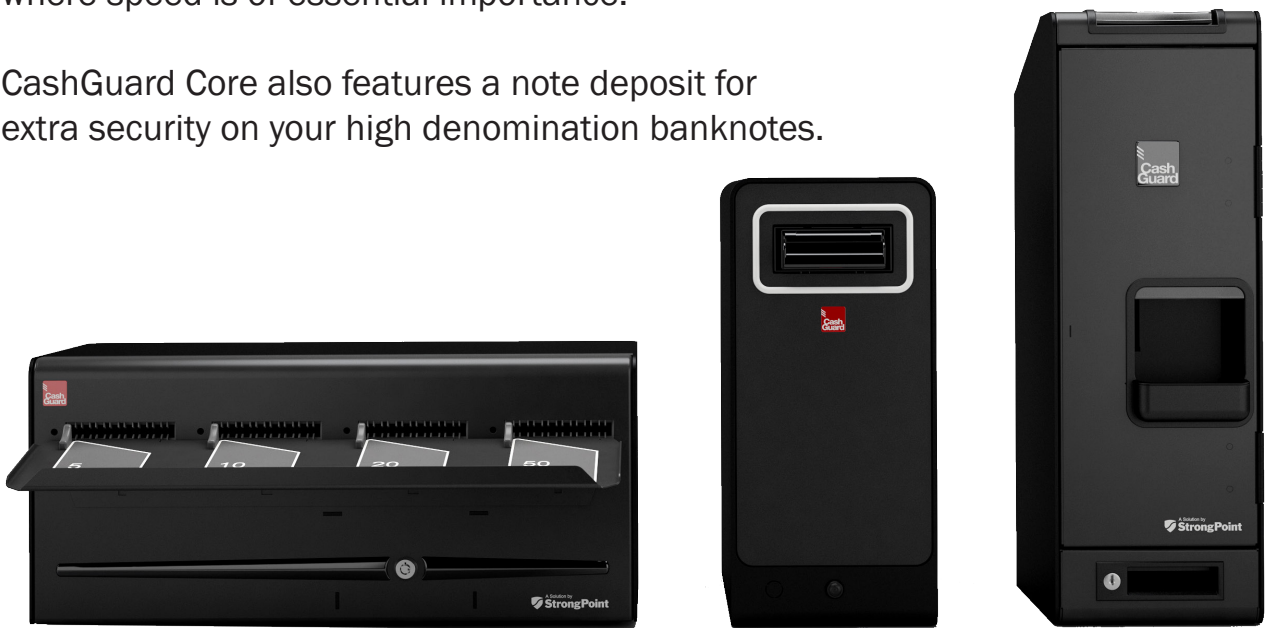

Overview

Recycling:	All denominations
Max deposit speed:	1,5 notes per second 5 coins per second
Max dispense speed:	3 notes per second 5 coins per second
Lock:	Mechanical
Operating System:	???
Currencies:	SEK, EUR
Display:	4,3" colour LCD display

Core Coin Recycler

Colour:	Black/Dark grey
Inlet:	Bunch feed of coins
Outlet:	Multi coin bowl
Denominations:	Max 8
Recycling Capacity:	1 500 coins
Coin Box:	1 500 coins
Customer Interface:	Interactive RGB lights

Core Note Recycler (3/4/5 cassette option)

Colour:	Black/Dark grey
Configuration:	Multislot with 1-3 denominations per cassette
Denominations:	Max 7
Note Capacity:	200 per cassette (600/800/100)


Core Note Deposit

Colour:	Black/Dark grey
Configuration:	Single feed of notes
Denominations:	Max 7
Note Capacity:	500 notes

Dimensions


Core Coin Recycler

Material: Steel Casing
Width: 190 mm
Height: 560 mm
Depth: 330 mm
Weight: 23 kg (excl. coins)

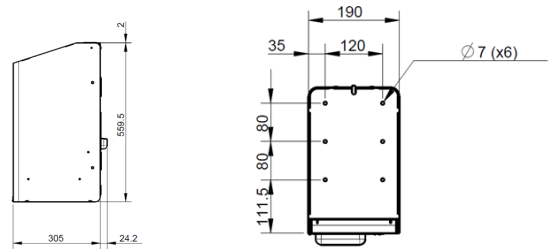

Core Note Recycler (3/4/5 cassette option)

Material: Steel Casing
Width: 240 / 553 / 686 mm
Height: 248 mm
Depth: 302 mm
Weight: 31 / 39,5 / 48 kg

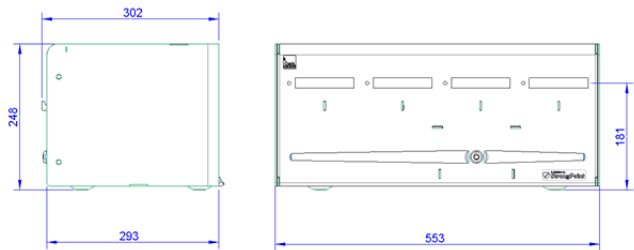

Core Note Deposit

Material: Steel Casing
Width: 188 mm
Height: 409 mm
Depth: 410 mm
Weight: 28 kg



Certifications and Compliance

CE

EMC Directive 2014/30/EU
LVD Directive 2014/35/EU
RoHS Directive 2011/65/EU
WEEE Directive 2012/19/EU

Note Validation

ECB Decision ECB/2010/14

Reliability

MTBF: 100 000 notes/coins
Technical life time: 7 years

POS Protocol

Main Controller supporting:
- Bi-directional API
- Polled protocol

Electric/Software Specifications

Power Supply

Voltage: 100-230 V AC 50/60 Hz
Current: 4 A
Max: 221 W
Idle: 20 W

Connections

POS: RS232-TCP/IP-USB B
Store Manager: TCP/IP
Recyclers: 24V and RS232 combined
Log/Update: 2 x USB A

Back office Software

Store Manager v 6 or newer