


Palonnier en H aluminium
Palonnier réglable

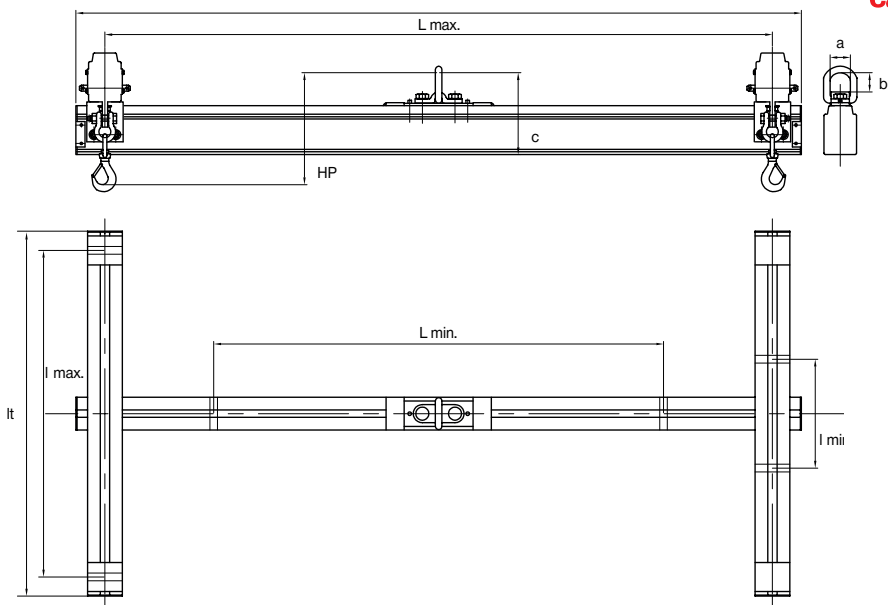

CMU en kg	LT en mm	IT en mm	L max. en mm	L min. en mm	l max. en mm	l min. en mm	HP en mm	Dimensions en mm			Référence	
								a	b	c		
125	1000	1000	840	440	900	500	310	56	53	226	8714 1211	
	2000		1840	940							8714 1221	
	3000	2000	2840	1440	1900	900					8714 1231	
		1000	3840	1940	900	500					8714 1232	
	4000	1000	2000	3840	1940	1900					900	8714 1241
		2000										1900
250	1000	1000	840	440	900	500	310	56	53	226	8714 2511	
	2000		1840	940							8714 2521	
	3000	2000	2840	1440	1900	900					8714 2531	
	4000		1000	3840	1940	900					500	8714 2532
	4000	1000	2000	3840	1940	1900					900	8714 2541
		2000										1900
500	1000	1000	840	440	900	500	310	56	53	226	8714 5011	
	2000		1840	940						8714 5021		
	3000	2000	2840	1440	1900	900				276	8714 5031	
	4000	1000	2000	3840	1940	1900				900	8714 5032	
		2000									900	500
	750	1000	1000	840	440	900				500	310	56
2000		1840		940	8714 7521							
3000		2000	2840	1440	1900	900	276	8714 7531				
		1000	2000	3840	1940	1900	900	8714 7532				
2000		900						500	8714 7541			
1000		1000	1000	840	440	900	500	310	56	53		
	2000	1840		940	8714 1011							
	3000	2000	2840	1440	1900	900	306				8714 1021	
		1000	2000	3840	1940	1900	900				8714 1031	
	2000	900									500	8714 1032
	1600	1000	1000	840	440	900	500				310	56
2000		1840		940	8714 2021							
3000		2000	2840	1440	1900	900	341	8714 1032				
		1000	2000	3840	1940	1900	900	8714 2011				
2000		900						900	8714 2021			
2000		1000	1000	840	440	900	500	310	56	53		
	2000	1840		940	8711 1021							
2000	1000	1000	840	440	900	500	310	56	53	306	8711 1021	
	2000		1840	940						8711 1021		