

# Dry Ice Blasting Unit

## ASCOJET 2008 Combi Pro complete (fully adjustable)

part no. 901050




The **ASCOJET 2008 Combi Pro** combines a powerful double hose system, which can be optionally used as a one-hose system, with the option of cleaning with dry ice pellets and the additional abrasive effect of an additive. Thus, users can choose from two blasting options, namely pure dry ice blasting or combination blasting.

Designed specifically for the high-end sector, the **ASCOJET 2008 Combi Pro** is ideal for maximum performance and time savings.

### Powerful and handy blasting gun:

Thanks to a **quick connect coupling** the gun can be attached to the blasting unit very easily.

Increased security thanks to the **locking pin**, which makes a sudden opening of the locking mechanism of the nozzle impossible.

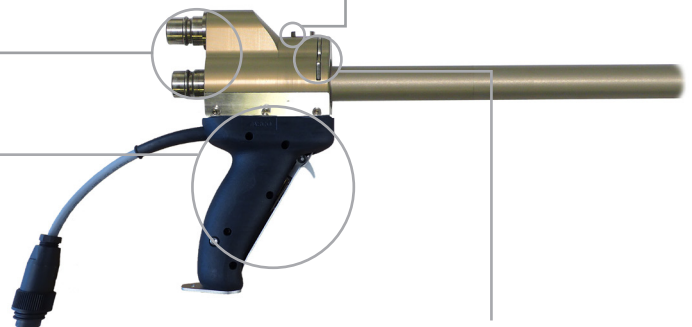

The **ergonomic gun handle** ensures very easy handling and comfortable operation when blasting over longer periods. The new developed safety button is ideal for left and right-hander.

### Specifications

Material:	frame and cover sheets made of powder-coated steel
Dimensions (L x W x H) (inkl. wheels and handle):	752 x 608 x 1'103mm(30 x 24 x 44 in)
Weight empty:	approx. 89 kg (196.2 lb)
Content of pellet hopper:	approx. 23 kg (50.7 lb)
Content of box for additive:	approx. 12 kg (26.5 lb) (dep. on additive)
Blasting pressure with additive:	4 - 8 bar (58 - 116 psi) (adjustable)
Blasting pressure w/o additive:	0 - 20 bar (0 - 290 psi) (adjustable)
Blasting pressure 2 hose:	0 - 20 bar (0 - 290 psi) (adjustable)
Blasting pressure 1 hose:	0 - 10 bar (0 - 145 psi) (adjustable)
Dry ice consumption:	30 - 100 kg/h (66.14 - 220.46 lb)(stepless)
Additive consumption:	approx. 30 kg/h (66.14 lb/h) (depending on blasting pressure)
Voltage:	230 V, 50/60 Hz, 1 Ph (other V on request)
Max. power consumption:	600 W (0.80 HP) nominal
Connection:	Input: 3/4" BSP

A **quick exchange system** allows nozzles to be changed within seconds without any tools.




The dry ice blasting unit **ASCOJET 2008 Combi Pro** is standardly equipped with a HP tool case and the suitable nozzles, a HP6 gun as well as a 7,5 m (24.6 ft) double hose.

## ASCOJET 2008 Combi Pro: Special features




Double hose system for maximum performance



Optional 1- or 2-hose-system



Container for additive with approx. 12 kg (26.5 lb) capacity



Highly manoeuvrable



Integrated grounding roll for more safety



Optimum pellet flow thanks to maintenance-free electric vibrator

## ASCOJET 2008 Combi Pro: Standard scope of supply

### Blasting gun HP

Standard for the ASCOJET 2008 Combi Pro

Length: 45 cm (17.72 in)

Weight: 1.75 kg (3.86 lb)

Blasting pressure: 0-20 bar (0-290 psi)

part no. 4063750



including the corresponding blasting nozzle

### High performance barrel nozzle HP255

Standard for the blasting gun HP

Powerful nozzle

Outlet opening: approx. Ø 20 mm (0.79 in)

Length: 33 cm (12.99 in)

Inner diameter: 14 mm (0.55 in)

HP

part no. 4045393



### Blasting gun additive OHP

Standard for the ASCOJET 2008 Combi Pro

incl. protective glove additive (part no. 4061690)

part no. 4063751



including the corresponding blasting nozzle

### Blasting nozzle additive

Standard for the ASCOJET 2008 Combi Pro

part no. 4061580



### Hose assembly 7.5 m (24.6 ft) for HP gun

Standard for the ASCOJET2008 Combi Pro. Can also be used as an extension of the hose assembly.  
Incl. buckling protection on both sides of the compressed air hose,  
incl. control cable, grounded

HP

part no. 4046952



### Hose assembly 7.5 m (24.6 ft) for OHP gun additive

Standard for the ASCOJET 1708

OHP

part no. 4061696



### Protective hood for ASCOJET 1701/1708/2008

The newly developed hood for our blasting equipment protects the control elements from contamination. The transparent cover can be opened for easy view on and access to the operation elements. For cleaning the hood can easily be taken off.

part no. 4065213



## ASCOJET 2008 Combi Pro: Options

Pos. 001

### Tool Case HP

Contains the entire nozzle assortment (excl. gun and standard barrel nozzle, part no. 917182), fits the HP gun

Consists of 3 nozzles:  
part no. 4045394, 4046903, 4045395

part no. 4064576



Pos. 002

### Lighting kit for dry ice blasting gun

Compact torch  
LED light 160 lumen, 160 cm (63 in)  
Up to 25 hours battery life

Length: 10.6 cm (4.2 in)  
Weight: 120 g (0.35 lb)

OHS  
OHP  
HP

part no. 4064129



Pos. 003

### High performance barrel nozzle HP275

Increases the cleaning performance with same working pressure

Outlet opening: approx. Ø 24 mm (0.95 in)  
Length: 32 cm (12.59 in)  
Inner diameter: 15 mm (0.59 in)

HP

part no. 4045394



Pos. 004

### Flat nozzle 213.32/60

Newly designed nozzle with optimized geometry for better performance on large areas

Outlet opening: approx. 60 × 5 mm (2.36 x 13/64 in)  
Length: 33 cm (12.99 in)  
Inner diameter: 13 mm (0.51 in)

HP

part no. 4046903



## ASCOJET 2008 Combi Pro: Options

Pos. 005

### Barrel nozzle long HP2

The nozzle is designed to allow for a comfortable working position of the person in charge

Outlet opening: approx. Ø 20 mm (0.79 in)

Length: 52 cm (20.47 in)

Inner diameter: 14 mm (0.55 in)

HP

part no. 4045395



Pos. 006

### Protective sleeve for double hose system 220 mm (8.67 in)

To protect the control cable and blasting hose from dirt and damages

Available in meters

HP

part no. 40447266



Pos. 007

### Blasting gun OHP

To use the ASCOJET 2008 Combi Pro as a one hose system along with the hose assembly OHP (part no. 4045987)

Length 33 cm (12.99 in)

Weight: 1.05 kg (2.31 lb)

Blasting pressure: 0 - 10 bar (0 - 145 lb)

OHP

part no. 4063749



including the corresponding blasting nozzle  
**High performance barrel nozzle 709.23/15**

Standard for the blasting gun OHP

Most powerful nozzle of the ASCOJET single-hose system

Outlet opening: approx. Ø 15 mm (0.59 in)

Length: 23 cm (9 in)

Inner diameter: 9 mm (0.35 in)

part no. 4047144



Pos. 008

### Hose assembly 7.5 m (24.6 ft) ID 16 mm (0.63 in) for OHP gun

To be used with blasting gun OHP (part no. 4047312).

Can also be used to extend the hose assembly

incl. control cable, grounded

OHP

part no. 4045987



Pos. 009

### Tool case OHP basic

Contains the entire nozzle assortment (excl. gun and standard barrel nozzle, part no. 4063749), fits the OHP gun

Consists of 6 nozzles:

part no. 4045402, 4045403, 4047216, 4047141, 4047219, 4047220

OHP

part no. 4064567



# ASCOJET 2008 Combi Pro: Options

Pos. 010

## High performance barrel nozzle 709.17/14

part no. 4045402

To be used with the blasting gun OHP (part no. 4063749)  
Powerful and handy nozzle

OHP



Outlet opening: approx. Ø 14 mm (0.55 in)  
Length: 17 cm (6.69 in)  
Inner diameter: 9 mm (0.35 in)

Pos. 011

## Barrel nozzle short 709.09/11

part no. 4045403

Powerful nozzle to clean in narrow spaces,  
to be used with the blasting gun OHP (part no. 4063749)

OHP



Outlet opening: approx. Ø 11 mm (0.43 in)  
Length: 9 cm (3.54 in)  
Inner diameter: 9 mm (0.35 in)

Pos. 012

## Flat nozzle 709.23/45

part no. 4047216

Powerful nozzle suitable for blasting large areas

OHS  
OHP



Outlet opening: approx. 45 x 3.5 mm (1.77 x 0.14 in)  
Length: 23 cm (9 in)  
Inner diameter: 9 mm (0.35 in)

Pos. 013

## Barrel nozzle special 709.42/15

part no. 4047141

The nozzle is designed to allow for a comfortable working  
position of the person in charge

OHP



Outlet opening: approx. Ø 15 mm (0.59 in)  
Length: 42 cm (16.54 in)  
Inner diameter: 9 mm (0.35 in)

Pos. 014

## Angled nozzle 709.28/11/45°

part no. 4047219

A powerful nozzle for very confined spaces and difficult to  
reach spots

OHP



Outlet opening: approx. Ø 11 mm (0.43 in)  
Length: 28 cm (11 in)  
Inner diameter: 9 mm (0.35 in)

Pos. 015

## Angled nozzle 709.25/11/75°

part no. 4047220

A powerful nozzle for very confined spaces and difficult to  
reach spots

OHP



Outlet opening: approx. Ø 11 mm (0.43 in)  
Length: 25 cm (9.84 in)  
Inner diameter: 9 mm (0.35 in)

## ASCOJET 2008 Combi Pro: Options

Pos. 016

### Tool case OHP basic empty

Empty tool case with matching insert

OHP

part no. 4064575



Pos. 017

### Pellet cutter OHP

For cleaning sensitive surfaces.  
To be used with blasting gun OHP (part no. 4063749)  
and hose assembly OHP (part no. 4045987)

OHP

part no. 4047257



With safety quick connect coupling, 2.5 m (8.2 ft) hose and control cable, grounded

Pos. 018

### Converter coupling ASCOJET 2008 Combi Pro

This converter coupling makes it possible that the OHS gun with the corresponding blasting hose of the ASCOJET 1208 can be connected to the ASCOJET 2008 Combi Pro

Length: 7.8 cm (3.04 in)

Weight: 0.2 kg (0.44 lb)

Outlet opening: approx. Ø 34 mm (1.34 in)

OHS

part no. 4047040



Pos. 019

### Blasting gun OHS

Standard for the ASCOJET 1208

Length: 26 cm (102.36 in)

Weight: 1.0 kg (2.2 lb)

Blasting pressure: 0 - 10 bar (0 - 145 psi)

OHS

part no. 4063745



including the corresponding blasting nozzle  
**High performance barrel nozzle 707.15/12**

Standard for the blasting gun OHS

Powerful nozzle with low air consumption

Outlet opening: approx. Ø 12 mm (0.47 in)

Length: 15 cm (5.9 in)

Inner diameter: 7 mm (0.28 in)

part no. 4047321



Pos. 020

### Hose assembly 5m (16.4 ft) for OHS gun

Standard for the ASCOJET 1208, can also be used as an extension of the hose assembly  
incl. control cable, grounded

OHS

part no. 4047104





# ASCOJET 2008 Combi Pro: Options

Pos. 021

## Tool case OHS/OHP pro

Contains the entire nozzle assortment (excl. gun and standard barrel nozzle, part no. 917757), fits to the OHS and OHP guns

Consists of 5 nozzles:

part no. 4047228, 4047321, 4047216, 4047222, 4047223

OHS  
OHP

part no. 4064567



Pos. 022

## Barrel nozzle 707.09/10

Thanks to an inner diameter of only 7 mm (0.27 in) the barrel nozzle has a very economical air consumption but is nevertheless powerful

Outlet opening: approx. Ø 10 mm (3/8 in)

Length: 9 cm (3.54 in)

Inner diameter: 7 mm (0.28 in)

OHS  
OHP

part no. 4047228



Pos. 023

## Barrel nozzle 707.15/12

Thanks to an inner diameter of only 7 mm (0.27 in) the barrel nozzle has a very economical air consumption but is nevertheless powerful

Outlet opening: approx. Ø 12 mm (15.32 in)

Length: 15 cm (5.9 in)

Inner diameter: 7 mm (0.28 in)

OHS  
OHP

part no. 4047321



Pos. 024

## Angled nozzle 708.28/10/45°

A powerful nozzle for confined spaces with low air consumption

Outlet opening: approx. Ø 10 mm (0.39 in)

Length: 28 cm (10.97 in)

Inner diameter: 8 mm (0.31 in)

OHS  
OHP

part no. 4047222



Pos. 025

## Angled nozzle 708.25/10/75°

A powerful nozzle for confined spaces with low air consumption

Outlet opening: approx. Ø 10 mm (0.39 in)

Length: 25 cm (9.84 in)

Inner diameter: 8 mm (0.31 in)

OHS  
OHP

part no. 4047223



Pos. 026

## Tool case OHS/OHP pro empty

Empty tool case with matching insert

OHS  
OHP

part no. 4064570



## ASCOJET 2008 Combi Pro: Options

Pos. 027

### Protective sleeve for one hose system 165 mm (6.5 in)

To protect the control cable and blasting hose from dirt and damages

Available in meters

OHS  
OHP

part no. 4047265




Pos. 028

### Spare parts kit ASCOJET 2008 Combi Pro

Spare parts kit containing the most important spare parts to ensure quick reaction for continuous operation

part no. 4064990



Pos. 029

### Compressed air hose 7.5 m (24.6 ft)/ ID 25 mm (1 in)

Connecting hose between air compressor and dry ice blasting machine, incl. claw coupling and safety ring for fast and easy connection / disconnection

Material: Fabric hose / metal

Dimension: 7.5 m (24.6 ft)

Weight: 2.4 kg (5.59 lb)

part no. 4045955



Pos. 030

### Claw coupling with 19 mm (3/4 in) male thread

For fast connection and disconnection of the air line to the blasting equipment

part no. 4045949

