

CITY ELEMENTS 180 AR LEVO Q

CITY ELEMENTS 180 P-AR02/04

16.10360.2V001 L1.8-1XLEVO Q 17W SKI (3000K)/SYM. FQ

Illuminating bollard CITY ELEMENTS 180 P-AR 02/04

- For rotationally symmetric area distribution (L1.8)

Constructed from aluminium tube section \varnothing 180 mm

Total length 1200 mm

Aluminium top cap

Glass made of PMMA, clear

Light distribution: rotationally symmetric

(Characteristic: for place illumination)

Elec. equip.: LED-1XLEVO Q approx. 17 W(3000K)

With electrical ballast (175 mA)

(220-240V/50-60Hz)

Ingress protection IP65, protection rating I

With flange plate 250 x 250 x 12 mm

With inspection-door and C-rail for fuse-box

Colour: DB 703

Technical values

ULOR	5,4%
IK-Code	IK07
Ingress protection	IP65

Rated input power [W]	17.0
Rated luminous flux [lm]	1581.0
Efficiency [lm/W] system	93.0

LED lifetime:

L80 B10 / 85.000h - TA \leq 25°C

L70 B10 / 50.000h - TA $>$ 25 - \leq 50°C

CE

Advantages

- Asymmetrical and symmetrical light distribution available
- Ideal for pathway lighting


Downloads

Drawings:	CityElements_P-AR02-04_180.png
Installation instructions:	HessMA_CITY_ELEMENTS_POLLER_LED.pdf
Photometric data:	CITY ELEMENTS 180_illuminating_bollard.zip Hess_LED_Optiken_Optiques_o8.2018.pdf




CITY ELEMENTS 180 AR LEVO Q

Drawings

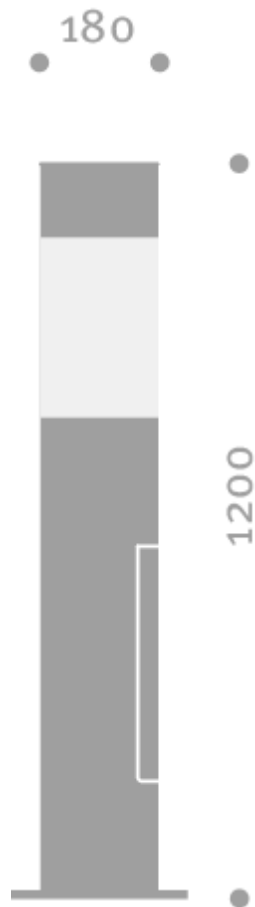

Projects

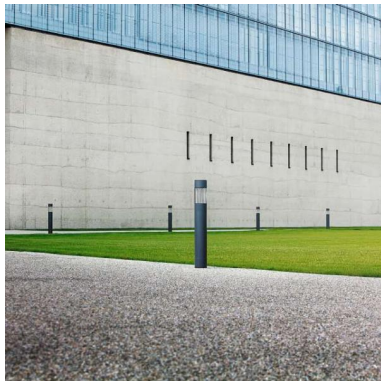

Technologiezentrum
DE - München



ADAC Zentrum
DE - München



ADAC Zentrum
DE - München