



## Saddle Mounting Tie

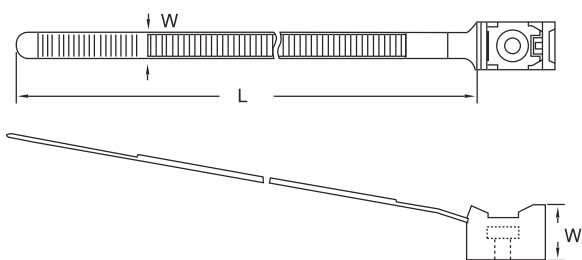

Material: UL approved NYLON 66, 94V-2

Part N°	Dimensions mm.		📦
	L	W	
<b>PMA-150</b>	144.6	7.0	100

## Double Locking Cable Tie



Material: UL approved NYLON 66, 94V-2 Colour: natural.  
For black please add -1 to Part N°.


Part N°	Dimensions mm.		ØMax. Bundle mm.	Max. Tensile Strength Kg.	📦
	L	W			
<b>DL-132</b>	132	9.0	30	55	100
<b>DL-180</b>	180	9.0	45	55	100
<b>DL-235</b>	235	9.0	55	55	100
<b>DL-265</b>	265	9.0	55	55	100
<b>DL-300</b>	300	9.0	88	55	100
<b>DL-360</b>	360	9.0	100	55	100
<b>DL-510</b>	510	9.0	150	55	100
<b>DL-610</b>	610	9.0	180	55	100
<b>DL-760</b>	760	9.0	230	55	100

## Double Locking Cable Tie




Material: UL approved NYLON 66, 94V-2

Part N°	Dimensions mm.		ØMax. Bundle Ø	Max. Tensile Strength	📦
	L	W			
<b>DK-200</b>	201	9.0	47	51	100
<b>DK-290</b>	292	9.0	72	80	100
<b>DK-380</b>	382	9.0	60	80	100



**DK-200**

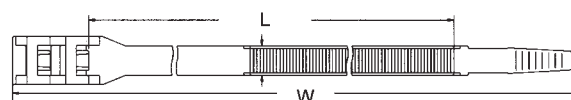

**DK-290,DK-380**