


AC184 SERIES

MULTI-PURPOSE ACCELEROMETER, M8 CAPTIVE BOLT, SIDE EXIT CONNECTOR / CABLE 100 mV/g




AC184-1A

2 Pin Connector

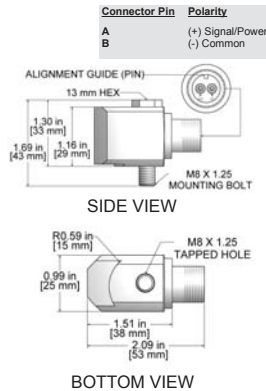


AC184-2A

Integral Cable

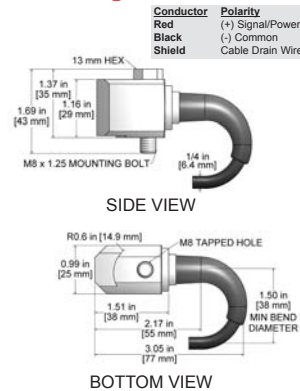

AC184-3A

Armored Integral Cable

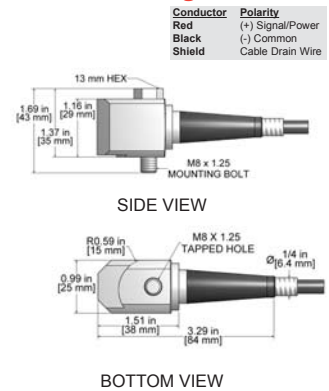

Part Numbers & Ordering Information:

AC184-1A Multi-purpose accelerometer, 100 mV/g, 2 pin side connector, with M8 captive bolt

AC184-2A/010-Z 10 ft. (3 m), blunt cut end
AC184-2A/020-Z 20 ft. (6 m), blunt cut end
AC184-2A/030-Z 30 ft. (9 m), blunt cut end
AC184-2A/050-Z 50 ft. (15 m), blunt cut end
AC184-2A/100-Z 100 ft. (30 m), blunt cut end
AC184-2A/010-F 10 ft. (3 m), BNC plug connector
AC184-2A/020-F 20 ft. (6 m), BNC plug connector
AC184-2A/030-F 30 ft. (9 m), BNC plug connector
AC184-2A/050-F 50 ft. (15 m), BNC plug connector
AC184-2A/100-F 100 ft. (30 m), BNC plug connector

AC184-3A/010-Z 10 ft. (3 m), blunt cut end
AC184-3A/020-Z 20 ft. (6 m), blunt cut end
AC184-3A/030-Z 30 ft. (9 m), blunt cut end
AC184-3A/050-Z 50 ft. (15 m), blunt cut end
AC184-3A/100-Z 100 ft. (30 m), blunt cut end
AC184-3A/010-F 10 ft. (3 m), BNC plug connector
AC184-3A/020-F 20 ft. (6 m), BNC plug connector
AC184-3A/030-F 30 ft. (9 m), BNC plug connector
AC184-3A/050-F 50 ft. (15 m), BNC plug connector
AC184-3A/100-F 100 ft. (30 m), BNC plug connector

* Custom Lengths Available Upon Request

Performance Specifications	English	Metric
Sensitivity $\pm 10\%$	100 mV/g	100 mV/g
Frequency Response		
± 3 dB	30-600,000 CPM	0.5-10000 Hz
$\pm 10\%$	120-300,000 CPM	2.0-5000 Hz
Dynamic Range	± 50 g, peak	± 50 g, peak
Electrical		
Settling Time (Turn on Time) @ Room Temp (68°F/20°C)	<2.5 Seconds	<2.5 Seconds
Power Requirement		
Voltage Source	18-30 VDC	18-30 VDC
Constant Current Excitation	2-10 mA	2-10 mA
Electrical Noise (Typical)		
Broadband 2.5 Hz to 25 kHz	200 μ g, rms	200 μ g, rms
Spectral 10 Hz	14 μ g/ $\sqrt{\text{Hz}}$	14 μ g/ $\sqrt{\text{Hz}}$
100 Hz	2.3 μ g/ $\sqrt{\text{Hz}}$	2.3 μ g/ $\sqrt{\text{Hz}}$
1000 Hz	2 μ g/ $\sqrt{\text{Hz}}$	2 μ g/ $\sqrt{\text{Hz}}$
Output Impedance, Max	<100 ohm	<100 ohm
Bias Output Voltage	10-14 VDC	10-14 VDC
Electrical Case Isolation	>10 ⁸ ohm	>10 ⁸ ohm

Environmental	English	Metric
Temperature Range	-58 to 250° F	-50 to 121° C
Maximum Shock Protection	5,000 g, peak	5000 g, peak
Electromagnetic Sensitivity	CE	CE
Sealing	Welded, Hermetic	Welded, Hermetic
Submersible Depth (AC184-2A)	500 ft.	152 m
Physical		
Sensing Element	PZT Ceramic	PZT Ceramic
Sensing Structure	Shear Mode	Shear Mode
Weight	6 oz.	170 grams
Case Material	316L Stainless Steel	316L Stainless Steel
Mounting Hole	M8	M8
Connector (AC184-1A)	2 Pin MIL-C-5015	2 Pin MIL-C-5015
Integral Cable (AC184-2A)	CB103	CB103
Armored Cable (AC184-3A)	CB206, Armor Jacket	CB206, Armor Jacket
Mechanical		
Resonant Frequency	1,200,000 CPM	20000 Hz
Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
Supplied Accessories		
Mounting Hardware	M8 Captive Bolt	M8 Captive Bolt
Calibration Certificate	CA10	CA10

Common Applications

Industries Served

- Automotive
- Petrochemical
- Steel
- Manufacturing
- Pharmaceutical
- Wastewater Treatment

Typical Applications

- Air Compressors
- Dryer Sections <250° F (121° C)
- Motors
- Pumps, Underwater
- Air Handlers
- Fans
- Press Sections
- Roll and Process Equipment

Measurement Types

- Permanent Mount
- Portable

- Military
- Power
- Mining
- Pulp and Paper

- Conveyors
- Fourdriniers
- Presses and Stamping
- Spindles
- Cooling Towers
- Gear Boxes
- Pumps



UNCONDITIONAL, LIFETIME WARRANTY