

M-802 / 1602

M-803 / 1603

M-804 / 1604









Matrix DB-15 KVM Benefits

- ▶ Efficient system management with simultaneous multi-user access
- ▶ Support resolution up to 1920 x 1080
- ▶ SUN 1152 x 900 resolution compatible
- ▶ Multi-platform servers shared by different consoles in cascade connection
- ▶ Mix PS/2, USB & SUN with Multi-Platform switch capability
- ▶ Extended Cat6 cord remote access up to 150 meters
- ▶ Provide a diversity of consoles to access servers independently & simultaneously

Switch Features & Options

- Greater distances between your switch and servers allow enhanced data center rack layouts
- Multi lingual on screen display menu
- Advanced user profiles and configurable OSD hot key combinations

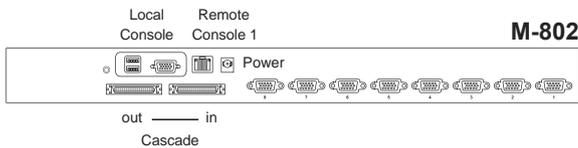

Ordering Information


| Console | Local | Remote | IP | 8-port | 16-port |
|---------------|-------|--------|----|--------------|---------------|
| 1 person icon | 1 | 1 | 0 | M-802 | M-1602 |
| 2 people icon | 1 | 2 | 0 | M-803 | M-1603 |
| 3 people icon | 1 | 3 | 0 | M-804 | M-1604 |

KVM Specification

| | |
|------------------------------|--|
| ■ KVM Port | Number of ports: 8 or 16 Connector: DB-15 combo connector Connectivity: Combo 4-in-1 KVM cable up to 6, 10 & 15 feet |
| ■ Local Console | Monitor port: 1 x DB-15 VGA (Up to 1920 x 1080 / 1920 x 1200) Keyboard & mouse port: 2 x USB type connector for keyboard & mouse |
| ■ Cat6 Remote Console | Number of remote port: 1 for M-802 / M-1602 2 for M-803 / M-1603 3 for M-824 / M-1604 Monitor port: DB15-pin VGA (Up to 1600 x 1200) Keyboard & mouse port: 2 x USB type connector for keyboard & mouse Remote I/O: RJ45 via Cat5 / Cat5e / Cat6 cable up to 500 feet |
| ■ Expansion: | Up to 240 servers by 8-level cascade |
| ■ Compatibility | Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac Support: Windows 7 / Vista / 2003 / XP, Linux, Unix |

| | |
|------------------------------|--|
| ■ Power | Input: AC power adapter Consumption: Max. 48 Watt, Standby 5 Watt |
| ■ Regulatory : | Safety: cUL, FCC & CE certified Environment: RoHS2 & REACH compliant |
| ■ Environmental | Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 90%, non-condensing Shock: 50G peak acceleration (11ms, half-sine wave) Vibration: 58~100Hz / 0.98G (11ms / cycle) |
| ■ Product Information | Dimension (W x D x H): 443 x 171 x 44 mm / 17.4 x 6.7 x 1.73 inch Net weight: 3 kg / 6.5 lb |
| ■ Packing Information | Dimension (W x D x H): 500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch Gross weight: 5 kg / 11 lb |


KVM port connection

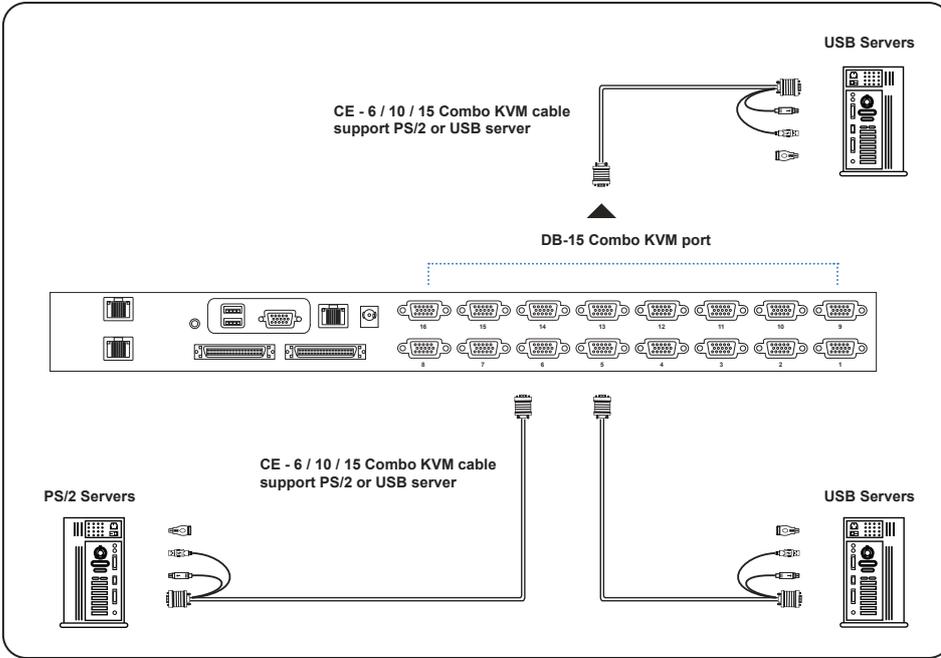

CE-6 / CE-10 / CE-15


- 6 / 10 / 15 ft Combo KVM cable
- Support PS/2 or USB server

Local console & remote console connection

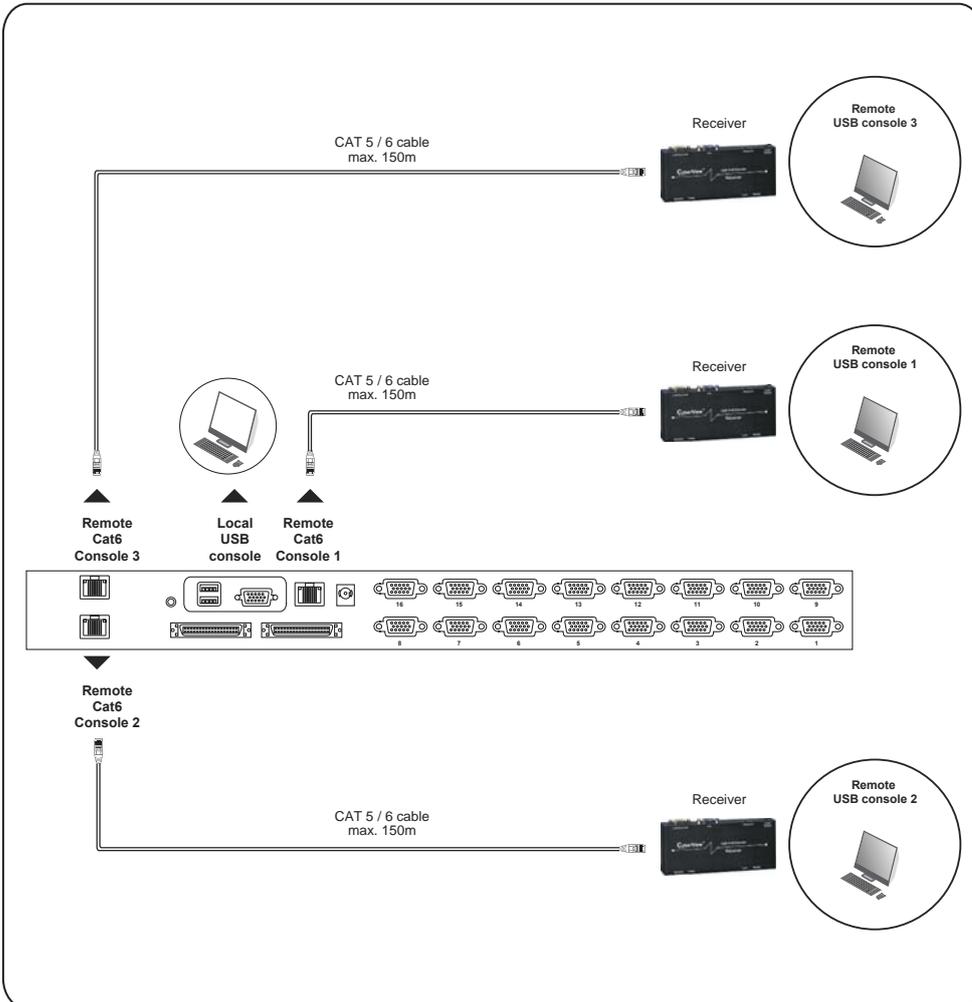

KVM Cascade

- Cascade up to 8 levels, 240 servers
- Cascading multiple KVM with CMC-8 cascade cable.

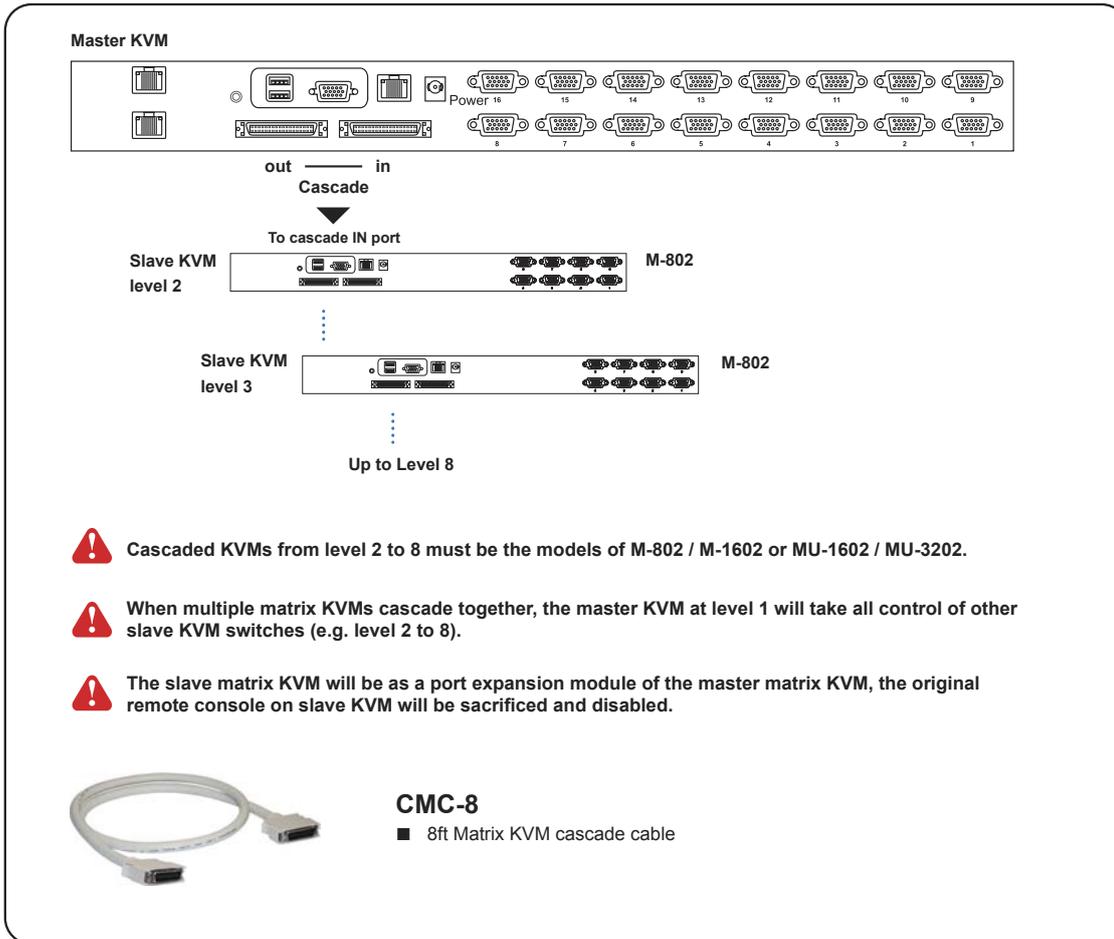

⚠ For detailed product specifications and options, please download the user manual from the link below : www.austin-hughes.com/support/usermanual/cyberview/UM-CV-MKVM.pdf