

CV-1201D




DVI-D KVM Benefits

- ▶ 12-port DVI-D, USB & Audio KVM
- ▶ DVI-D single link support 1920 x 1200 transmission
- ▶ Support widescreen & native SUN 1152 x 900 resolution
- ▶ Multi-platform for PCs, SUN and Mac G3 / G4 Mac / iMac
- ▶ Hot pluggable, no software or drivers required

Switch Features & Options

- Support VESA DDC2B emulation & TMDS signal pass-through
- Port switching via push button & keyboard hotkeys




Ordering Information


Console	Local	Remote	IP	12-port
	1	0	0	CV-1201D

KVM Specification

■ KVM Port Number of ports: 12 Connector: DVI-D connector USB 3.0 connector (combined for keyboard, mouse & audio) Connectivity: Combo 4-in-1 KVM cable, 6 or 15 feet	■ Regulatory : Safety: FCC & CE certified Environment: RoHS2 & REACH compliant
■ Local Console Graphic Connector: 1 x DVI-D Resolution: Up to 1920 x 1200 Input device: 2 x USB type A for keyboard & mouse Audio out: 1 x 3.5mm stereo audio	■ Environmental Operating: 0 to 50°C Storage: -5 to 60°C Relative humidity: 90%, non-condensing Shock: 50G peak acceleration (11ms, half-sine wave) Vibration: 58~100Hz / 0.98G (11ms / cycle)
■ Management PC Selection: Front button & hotkey	■ Product Information Dimension (W x D x H): 443 x 171 x 44 mm / 17.4 x 6.7 x 1.73 inch Net weight: 2.5 kg / 5.5 lb
■ Compatibility Multi-platform: Mix PCs, SUN and Mac G3 / G4 Mac / iMac Support: Windows 7 / Vista / 2003 / XP, Linux, Unix	■ Packing Information Dimension (W x D x H): 500 x 400 x 90 mm / 19.7 x 15.7 x 3.5 inch Gross weight: 5.4 kg / 11.9 lb
■ Power Input: Auto sensing 100 to 240VAC, 50 / 60 Hz Consumption: Max. 12 Watt, Standby 5 Watt	

KVM port connection

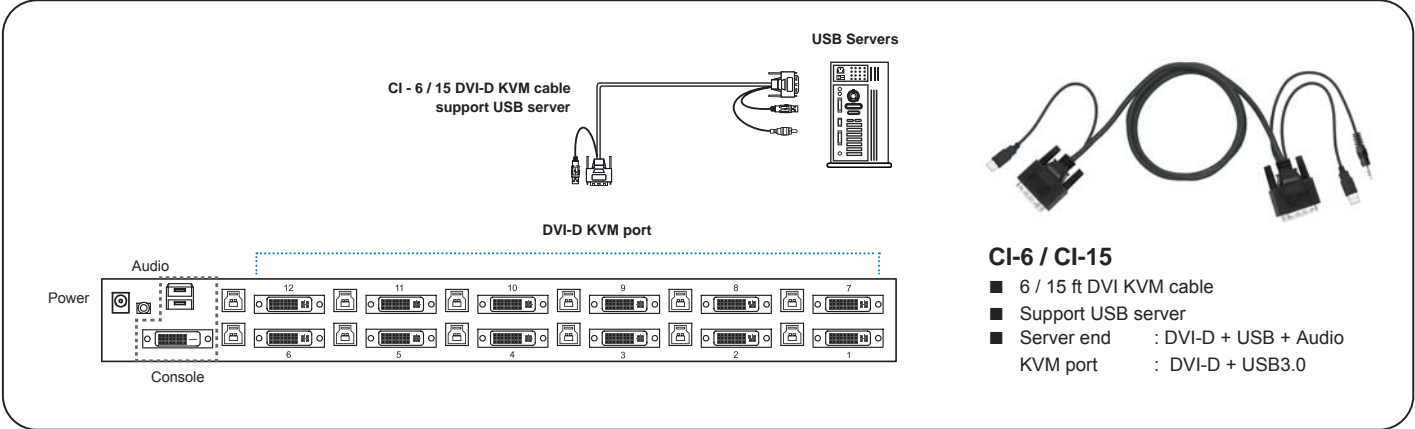

 For detailed product specifications and options, please download the user manual from the link below : www.austin-hughes.com/support/usermanual/cyberview/UM-CV-DVIKVM.pdf

Front Panel - Port LED Indications

