

TECHNICAL DATA SHEET

RAXTAR of the Netherlands is a privately owned organization that provides world class vertical access solutions: construction hoists for passengers & materials, material hoists, transport platforms and industrial lifts. RAXTAR builds on innovation & technology to deliver unequalled operational reliability at the lowest total cost of ownership (TCO) in the market. RAXTAR is a synonym for meeting the highest quality- and safety standards.




RX2032F Passenger & Material Hoist

TECHNICAL DATA*


CAPACITY			
Payload	:	2000 kg	4400 lb
Lifting speed	:	0 - 42 m / min	0 – 138 ft / min
Counter weight	:	No	No
Maximum lifting height	:	200 m	660'
	•	200 m	
DIMENSIONS & WEIGHT			
Hoist car internal dimensions (I x w x h)	:	3.10 x 1.52 x 2.60 m	10' 2" x 5'x 8' 6"
Ground enclosure (l x w x h)	:	3.51 x 2.69 x 2.94 m	11' 6" x 9' 10" x 9' 8"
Length mast section	:	1.51 m	4'11″
Weight mast section, single rack	:	120 kg	265 lb
Weight mast section, double rack	:	150 kg	330 lb
-		-	
ELECTRICAL DATA			
Motor	:	2x 11 kW	2x 11 kW
Power supply	:	400 V – 50 hz, 3p	460 V – 60 hz, 3p
110 V / 230 V power on platform	:	Standard, included	Standard, included
Overload device	:	Standard, included	Standard, included
Automatic lubrication	:	Optional	Optional
HOIST CONTROLS			
Controls	:	Frequency control / SNL / PLC	Frequency control / SNL / PLC
User interface	:	Joystick / touch panel	Joystick / touch panel
Blue tooth communication	:	Optional	Optional
Manual controls / erection controls	:	Standard, included	Standard, included
Drop test controls	:	Standard, included	Standard, included
Programmable landings	:	Optional	Optional
Hoist calling system	:	Optional	Optional
RX Control, internet management control	:	Optional	Optional
GENERAL			
Finishing cabin / ground enclosure	:	Galvanized / powder coated	Galvanized / powder coated
Company logo and color	:	Optional	Optional
Ground enclosure	:	Standard, included	Standard, included
C-door	:	Optional	Optional
Cable trolley system	:	Standard, included	Standard, included
Erection jib	:	Optional	Optional
Norms & regulations	:	Machine Directive (EN12159+A1) /	Machine Directive (EN12159+A1) /
		A10.4:2007 (USA)	A10.4:2007 (USA)



RX2032F Passenger & Materal Hoist

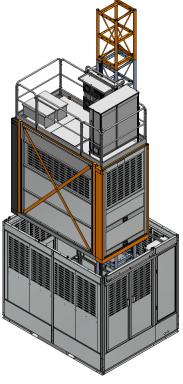


Overview

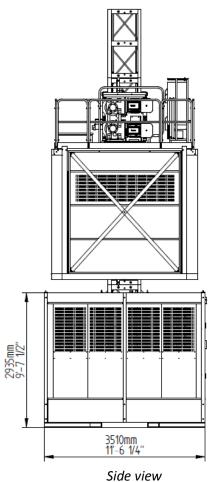


De Run 4455, NL-5503 LS Veldhoven The Netherlands

T +31(0)88 369 0000 E info@raxtar.com I www.raxtar.com

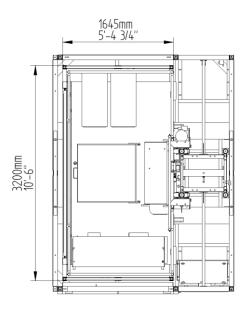

Top view

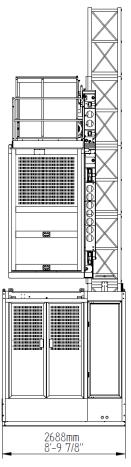



Front view

*Data based on a standard configuration This information is subject to change without prior notice. Version: 1-2012




RX2032FT Passenger & Materal Hoist (twin configuration)

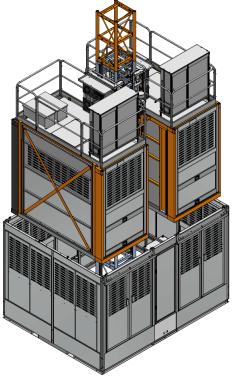

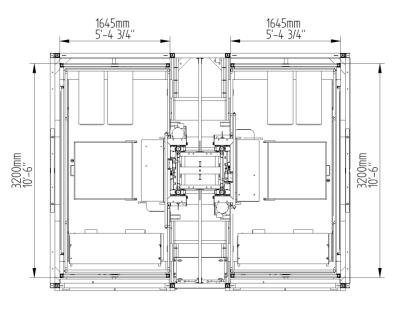


Top view

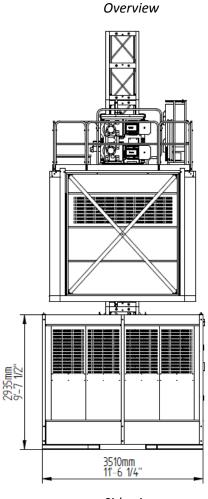

Side view

De Run 4455, NL-5503 LS Veldhoven The Netherlands

T +31(0)88 369 0000 E info@raxtar.com I www.raxtar.com

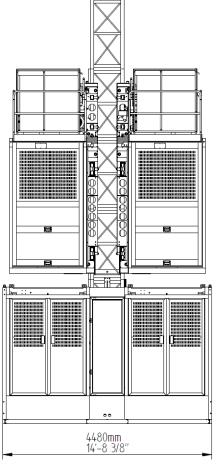

Front view

*Data based on a standard configuration This information is subject to change without prior notice. Version: 1-2012